

FineController for protective contact socket




Type 3 surge protection device to EN 61643-11,
intended for use in protective contact sockets.


- Adapter
- Disconnection device and function display
- Child lock through increased finger touch protection

Type	Country version	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
FC-D	EN	Pure white	1	11,000	5092800

Dimensions

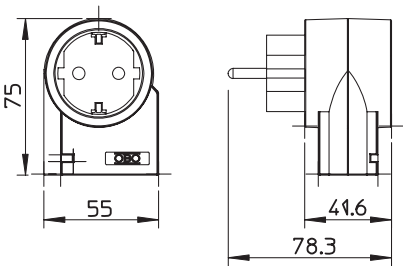

Connection options

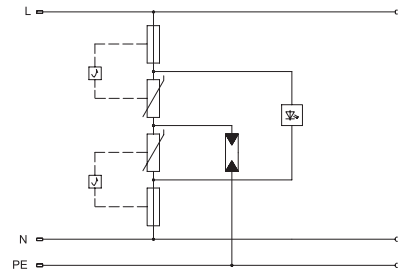

FC-D	
Nominal voltage V	U_n 230
Max. continuous operating voltage V	U_c 275
SPD to EN 61643-11	Type 3
SPD to IEC 61643-11	Class III
Lightning protection zone LPZ	2→3
Nominal discharge current (8/20) kA	I_n 3
Protection level (L-N) kV	< 1,2
Protection level (N-PE) kV	< 1,5
Maximum back-up fuse A	16
Response time ns	t_a <25