

# Technical data sheet

## Surge protection, arrester, type 1 (industry)



### Combination arrester, 1-pole with function display




Combination arrester, 1-pole, for use in TN and TT networks:

MCD 50-B-OS: Coordinated lightning current arrester, Type 1 (Class B) to EN 61643-11 with visual function display. For interface 0 to 2 (LPZ) in accordance with lightning protection zone concept to IEC 61312-1 and/or DIN VDE 0185-305.

- Arresting capacity 50 kA (10/350 µs) per pole
- Power consumption < 26 mW/pole
- Protection level < 1.3 kV
- Line follow current quenching 25 kA Ipeak
- Incl. plug caps for identifying the connections
- Encapsulated, non-extinguishing spark gap
- Can be used in standard distributor housings.


#### Dimensions

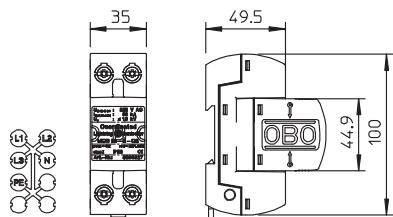

Application example: Compact surge protection concepts and installations of requirement class B+C arrestors in a distributor without decoupling inductances and/or line lengths, e.g. direct on mobile radio system.

Type	Highest continuous voltage V	Pack. Weight pcs	Item No. kg/100 pcs.
MCD 50-B-OS   255	1-pole	1	34.800   5096852

#### Connection options



#### MCD 50-B-OS

Nominal voltage V	$U_N$	230
SPD to EN 61643-11		Type 1
SPD to IEC 61643-11		Class I
Lightning protection zone LPZ		0→2
Impulse discharge current (10/350) kA	$I_{imp}$	50
Total discharge current (10/350) kA	$I_{total}$	50
Nominal discharge current (8/20) kA	$I_n$	50
Arrestor surge current (8/20) [total] kA	$I_{Total 8/20}$	50
Voltage protection level kV	$U_p$	1
Response time ns	$t_A$	<100
Follow current quenching capacity (eff) [N-PE] kA	$I_{ff}$	25
Maximum back-up fuse A		500
Temperature range °C	$\vartheta$	-40-85
Division unit TE (17.5 mm)		2
Protection rating		IP20
Connection cross-section rigid mm²		10-50
Connection cross-section, multi-wire mm²		10-35
Connection cross-section, flexible mm²		10-25