

Combination arrester, 3-pole + NPE with function display



Combination arrester, 4-pole, with visual function display, for use in TN-S and TT networks.


Completely pre-terminated and ready for connection, consisting of:

MCD 50-B_OS: Type 1 (Class B) coordinated lightning current arrester to DIN EN 61643-11.

MCD 125-B/NPE: Coordinated N-PE spark gap, type 1 (Class B) to EN 61643-11 for use in TN-S and TT systems. Interface 0 to 1 according to lightning protection zone concept according to IEC 61312-1 and DIN VDE 0185-305.

- Arresting capacity 50 kA (10/350 μ s) per pole (L-N)
- Arresting capacity 125 kA (10/350 μ s) per pole (N-PE)
- Power consumption < 26 mW/pole
- Protection level < 1.3 kV
- Line follow current quenching 25 kA I_{peak}
- Incl. plug caps for identifying the connections
- Encapsulated, non-extinguishing spark gap
- Can be used in standard distributor housings.

Dimensions

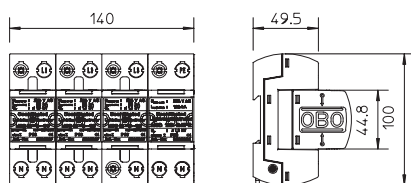


Application: Lightning protection equipotential bonding for buildings, even with external lightning protection of classes I to IV in standard distribution housings.

Type	Highest Version continuous voltage V	Pack. pcs	Weight kg/100 pcs.	Item No.
------	--------------------------------------	-----------	--------------------	----------

MCD 50-B 3+1-OS	255	3 + NPE	1	172,000	5096836
------------------------	-----	---------	---	---------	----------------

Connection options



MCD 50-B 3+1-OS

Nominal voltage V	U _N	230
SPD to EN 61643-11		Type 1
SPD to IEC 61643-11		Class I
Lightning protection zone LPZ		0→2
Impulse discharge current (10/350) kA	I _{imp}	50
Total discharge current (10/350) kA	I _{total}	125
Nominal discharge current (8/20) kA	I _n	50
Arrester surge current (8/20) [total] kA	I _{total 8/20}	125
Voltage protection level kV	U _p	1
Response time ns	t _A	<100
Follow current quenching capacity (eff) [N-PE] kA	I _{fi}	25
Maximum back-up fuse A		500
Temperature range °C	θ	-40-85
Division unit TE (17.5 mm)		8
Protection rating		IP20
Connection cross-section rigid mm ²		10-50
Connection cross-section, multi-wire mm ²		10-35
Connection cross-section, flexible mm ²		10-25