


Surge arrester, 1-pole + NPE with remote signalling



V 20-C/...: Surge protection device Type 2 Class C) to VDE 0675 part 6-11 (DIN EN 61643-11).

- With new MultiBase base part and Multi-connection clamps
- Complete unit consisting of upper part and base, pre-mounted and ready for connection
- VDE-tested
- Suitable for TN- and TT- network systems
- Plug-in upper part; upper part can be separated from base without tools
- With remote signalling, potential-free changeover contact, for function monitoring
- Including thermal and dynamic separating device
- With visual display of defects
- High current conductivity and long service life
- Marked connections


Dimensions

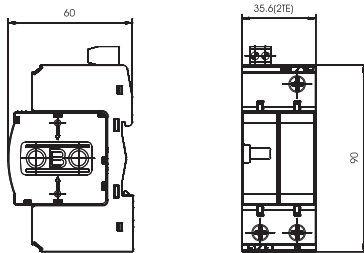

Application example: residential buildings, single-family homes

Type	Highest Version	Pack.	Weight	Item No.
		pcs	kg/100 pcs.	
V20-C 1+NPE+FS	280 1+NPE + FS	1	22,500	5094760

Connection options



V20-C 1+NPE+FS

Nominal voltage V	U_N	230
SPD to EN 61643-11		Type 2
SPD to IEC 61643-11		Class II
Lightning protection zone LPZ		1→2
Nominal discharge current (8/20) kA	I_n	20
Arrestor surge current (8/20) [total] kA	$I_{Total 8/20}$	40
Maximum discharge current (8/20 μ s) kA	I_{max}	40
Voltage protection level kV	U_p	< 1,3
Response time ns	t_A	< 25
Maximum back-up fuse A		125
Temperature range °C	ϑ	-40-80
Division unit TE (17.5 mm)		2
Protection rating		IP20
Connection cross-section rigid mm ²		2,5-35
Connection cross-section, multi-wire mm ²		2,5-35
Connection cross-section, flexible mm ²		2,5-25