

Technical data sheet Surge protection, arrester, type 3



Fine power protection / socket bar




CNS 3-D: Type 3 surge protection device to DIN EN 61643-11, intended for use in protective contact sockets.

- With visual and audible signalling, function display
- 3-way socket
- Length of connection cable: 2 m
- Y circuit for high electrical safety


Application: For example, the protection of PCs, printers, copiers, fax machines, etc.

Type	Country version	Colour	Con- nection cable length m	Pack. pcs	Weight kg/100 pcs.	Item No.
CNS 3-D-D	EN	Black	2	1	65,000	5092701

Dimensions

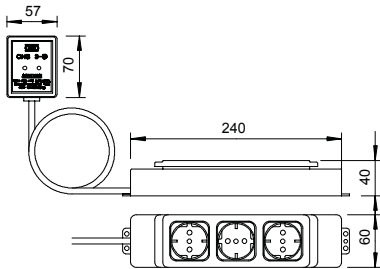

Connection options



CNS 3-D-D

Nominal voltage V	U _n	230
Max. continuous operating voltage V	U _c	255
SPD to EN 61643-11		Type 3
SPD to IEC 61643-11		Class III
Lightning protection zone LPZ		2→3
Nominal discharge current (8/20) kA	I _n	2,5
Protection level (L-N) kV		< 1,0
Protection level (N-PE) kV		< 1,5
Maximum back-up fuse A		16
Response time ns	t _a	<25